

MTW / TEW or AWM Hook Up Wire



Scope:

Single conductor machine tool wire (MTW) with appliance wiring material (AWM) and with Thermoplastic Equipment Wire (TEW) – FT-1 is suitable for general purpose wiring, machine tools, and control cabinets and circuits. Note: VW-1 available where required. Also meets requirements of type THW-2, THW and TW.



Applicable Standards and Tests:

- ASTM B-1, B-3, and B-8, B-33
- UL 83, UL 758, UL 1063 and UL1581
- TEW-FT-1, NEC 310, NFPA 79, and CSA 22.2
- Spark tested at 7500 VAC



Construction:


Conductors: The single conductors are stranded annealed, tin coated or bare copper.



Insulation: Concentrically applied PVC (polyvinyl chloride) insulation rated at -25°C to 105°C, 600V for MTW and TEW, 1000V for AWM.

Identification and Packaging:

The wire shall be identified by surface marking indicating the manufacturer and AWG size. Products will be identified and surface printed in accordance with the UL and CSA requirements. 500 ft/spl. packed 4/box or 2500 feet/spl spools are standard. Custom lengths, non-standard colors, AWG and custom packaging are available by request.

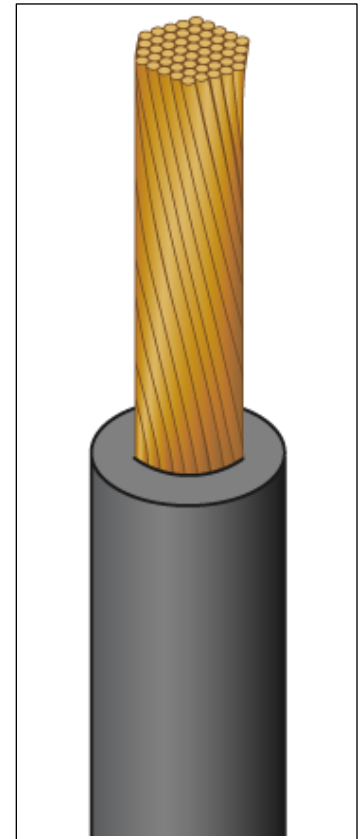

AWG	Standard Number of Strands	AWM Style	Insulation Thickness (mils)	Nominal Overall Diameter – Inches (standard strands)	Approx. Shipping Weight (Lbs/Mft)
22	7	1015	30	0.09	6
20	10	1015	30	0.10	7
18	16	1015	30	0.11	10
16	26	1015	30	0.12	14
14	19	1015	30	0.13	20
12	19	1015	30	0.15	30
10	19	1015	30	0.18	40
8	133	1028	45	0.26	74
6	133	1283	60	0.33	116
4	133	1283	60	0.38	167
2	133	1283	60	0.45	265
1	19 or 133	1284	80	0.49	353
1/0	19 or 133	1284	80	0.53	428
2/0	19 or 133	1284	80	0.58	481
3/0	19 or 133	1284	80	0.63	594
4/0	19 or 133	1284	80	0.69	735

P: (315) 339 5268 • F: (315) 339-5277 • sales@kristechwire.com • www.kristechwire.com

Spec: MTW / TEW or AWM Hook Up Wire
Issued: 07/29/2020 Supersedes: 07/18/2018