


# TRAY CABLE 12-2 AWG SHIELDED WITH AND WITHOUT GROUND XHHW/PVC

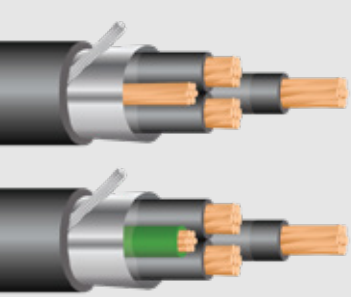

## APPLICABLE STANDARDS AND TESTS

- ✓ UL 1277 at 600 volts
- ✓ Flame Rated: IEEE 1202 (70,000 BTU)
- ✓ ICEA S-95-658/NEMA WC-70
- ✓ Temperature Rated at 90°C Wet/Dry
- ✓ -25°C Rated
- ✓ VW-1 Rated Conductors
- ✓ Direct Burial & Sunlight Resistant
- ✓ Exposed Runs Rated (TC-ER)
- ✓ Color Code: NEMA WC 57/ICEA S-73-532 Table E-1, E-2, or M4

## PRINT WHEEL

- ✓ Kris-Tech Wire XX AWG XX conductor E515926 (UL) shielded TC-ER XHHW-2 600V 90°C wet/dry PVC jacket sun res FT4 "RoHS" made in USA

## SCOPE

Stranded copper conductors (ASTM B-8), crosslinked polyethylene (type XHHW-2) insulated for moisture and heat resistance. Phase identified and cabled together with fillers and/or binders as required. Optional bare copper or insulated green ground cable is included as well. Cabled core is covered with an Aluminum-Mylar shield and a tinned copper drain wire, Covered with an overall black PVC jacket that is gas and oil resistant. Jacket available in colors. Suitable for use in hazardous locations: Class 1 and 2, Division 2.

## CONSTRUCTION

**Conductors:** Concentric 7 strand soft drawn annealed copper per UL and ASTM requirements. Tinned conductors and other stranded configurations are available upon request. Single conductors are Oil & Gas Resistant II.

**Insulation:** Crosslinked polyethylene (XLP) is VW-1 rated and Oil and Gasoline Resistant II. All black insulation is rated "Sunlight Resistant".

**Ground Conductor:** Bare copper conductor or insulated green crosslinked polyethylene (XLP) is Oil and Gasoline Resistant II.

**Shield:** Aluminum-Mylar shield with an optional tinned copper drain wire.

**Jacket:** A black, flame resistant, Polyvinyl Chloride (PVC) jacket is extruded over the assembly. The surface profile shall approximate that of the interior assembly.

## IDENTIFICATION AND PACKAGING

The wire shall be identified by surface marking indicating the manufacturer, conductor size, voltage rating, UL symbol, and type designation.

Custom lengths, color, and packaging is available by request.

### XHHW/PVC Tray Cable Shielded with NO Ground

AWG	Number of Conductors	Jacket Thickness (mils)	Nominal Diameter over Jacket (inches)	Approximate Net Weight (lbs./Mft.)
8	2	45	0.48	196
8	3	60	0.64	290
8	4	60	0.70	365
6	2	60	0.58	303
6	3	60	0.72	403
6	4	60	0.80	525
4	2	60	0.68	421
4	3	60	0.82	584
4	4	80	0.94	779
2	2	80	0.74	602
2	3	80	0.99	958

Spec: Tray Cable 12-2 AWG Shielded with and without Ground XHHW/PVC  
 Issued: 10/21/2022  
 Supersedes: 10/20/2020



**SNAP FOR MORE  
INFORMATION**

# TRAY CABLE 12-2 AWG SHIELDED WITH AND WITHOUT GROUND XHHW/PVC

## VALUE ADD SERVICE

- ✓ Custom lengths and put-ups
- ✓ 12 available colors
- ✓ Wire paralleling and cabling
- ✓ One Pull bundled wire solution
- ✓ Wire striping
- ✓ Custom print legends and labels

### XHHW/PVC Tray Cable Shielded with Bare Copper

AWG	Number of Conductors	Size of Ground Wire (AWG)	Jacket Thickness (mils)	Nominal Diameter over Jacket (inches)	Approximate Net Weight (lbs./Mft.)
12	2	12	45	0.39	118
12	3	12	45	0.44	148
10	2	10	45	0.43	175
10	3	10	45	0.49	204
8	2	10	60	0.55	250
8	3	10	60	0.63	322
6	2	8	60	0.63	365
6	3	8	60	0.72	467
4	2	8	60	0.71	492
4	3	8	60	0.79	632
2	2	6	60	0.80	694
2	3	6	80	0.99	958

### XHHW/PVC Tray Cable Shielded with Green Insulated

AWG	Number of Conductors	Size of Ground Wire (AWG)	Jacket Thickness (mils)	Nominal Diameter over Jacket (inches)	Approximate Net Weight (lbs./Mft.)
12	2	12	45	0.43	145
12	3	12	45	0.48	159
10	2	10	45	0.48	190
10	3	10	45	0.52	230
8	2	10	60	0.59	265
8	3	10	60	0.66	335
6	2	8	60	0.69	387
6	3	8	60	0.77	498
4	2	8	60	0.78	513
4	3	8	80	0.89	685
2	2	6	80	0.91	763

Spec: Tray Cable 12-2 AWG Shielded with and without Ground XHHW/PVC  
 Issued: 10/21/2022  
 Supersedes: 10/20/2020